

# Mvix CEENO+

web-based signage system  
with grids, zones and live tv



- HD Video & Images
- Grids / Split Screen
- RSS / Text Ticker / Weather
- Live TV / Video-in Feed


## Features

- HDMI Video Output
- Networked, Content Management Flexibility
- Affordable Digital Signage
- Scheduling and Day-Parting

## Applications

- Digital Menu Boards for Restaurants, Bars and Clubs
- Digital Wayfinding - Directions, Signs & Office Directories
- Stand-alone Product Video Showcases
- Advertising System for Malls, Stores, Grocery Stores
- Client or Employee Communication Systems for Offices

A networkable digital signage solution comprising of a small, embedded signage player and a network-based, content management software. The bundled, LAN-based and/or Web-based Digital Signage Content Management software enables media transfer, playlist management and scheduling of signage content- controlled by a standard web-browser. Mvix Ceeno+ provides support for split-screen signage displays (active zones)

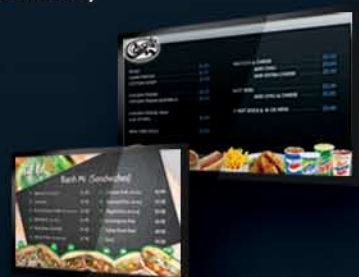

# Mvix CEENO+

low cost digital signage solution with centralized, remote-management



## Specifications

<b>Display Format</b>	Full Screen and Split Screen Playback (Videos and Images) plus scrolling bar for ticker, weather and date/time clock
<b>Video Resolution</b>	720p(1280x720) or 1080i(1920x1080) 16:9 ratio Up-conversion from 480i/P to component out (720P/1080i), VGA (720p)
<b>Format Support</b>	SD Video (720x576): MPEG-1, MPEG-2, MPEG-4, Divx, Xvid Audio: WAV, MP3 (32K - 320K bps) Images: BMP, TIFF, GIF, JPEG (max resolution: 5120x3840)
<b>Networking</b>	LAN RJ45 10 / 100 MB Wi-Fi 802.11g (optional, via wireless bridge)
<b>USB Ports</b>	1 x USB2.0 (For Media Transfer via a Flash Drive)
<b>Network Protocols</b>	NTP, FTP, HTTP for Media Transfer upto 300KBps download speeds with HTTP server
<b>Video Out</b>	HDMI Video Out Component (Y Pb Pr)
<b>Audio Out</b>	Analog audio (R / L)
<b>Signage Software</b>	Easy-to-use Web-based Application Manage Playback Sequence and Schedule Multiple Playlists to allow Scheduling Auto-Start mode to download and playback automatically Scrolling Text (RSS / Custom Text), Localized Graphical Weather Simultaneous Slide-show with background music playback Digital Image Transition Effects for Slide-shows Playback Log Report
<b>Dimensions</b>	W x D x H: 132mm x 102mm x 30mm Weight: 2.0 lb
<b>Power</b>	DC 12V DC adapter (110V / 220V Worldwide Compatible)
<b>Package Contents</b>	Mvix Ceeno Digital Signage Player with Mounting Holes 12V power AC adaptor (100-240V AC, 50/60Hz) Remote Control 3-in-1 Component Video Cable, Audio Jack Cable
<b>Certifications</b>	FCC, CE, RoHS

# Mvix

Solutions for the HD Planet  
[www.mvixusa.com](http://www.mvixusa.com)

866.310.4923